


HELLA

OUTDOOR BLINDS

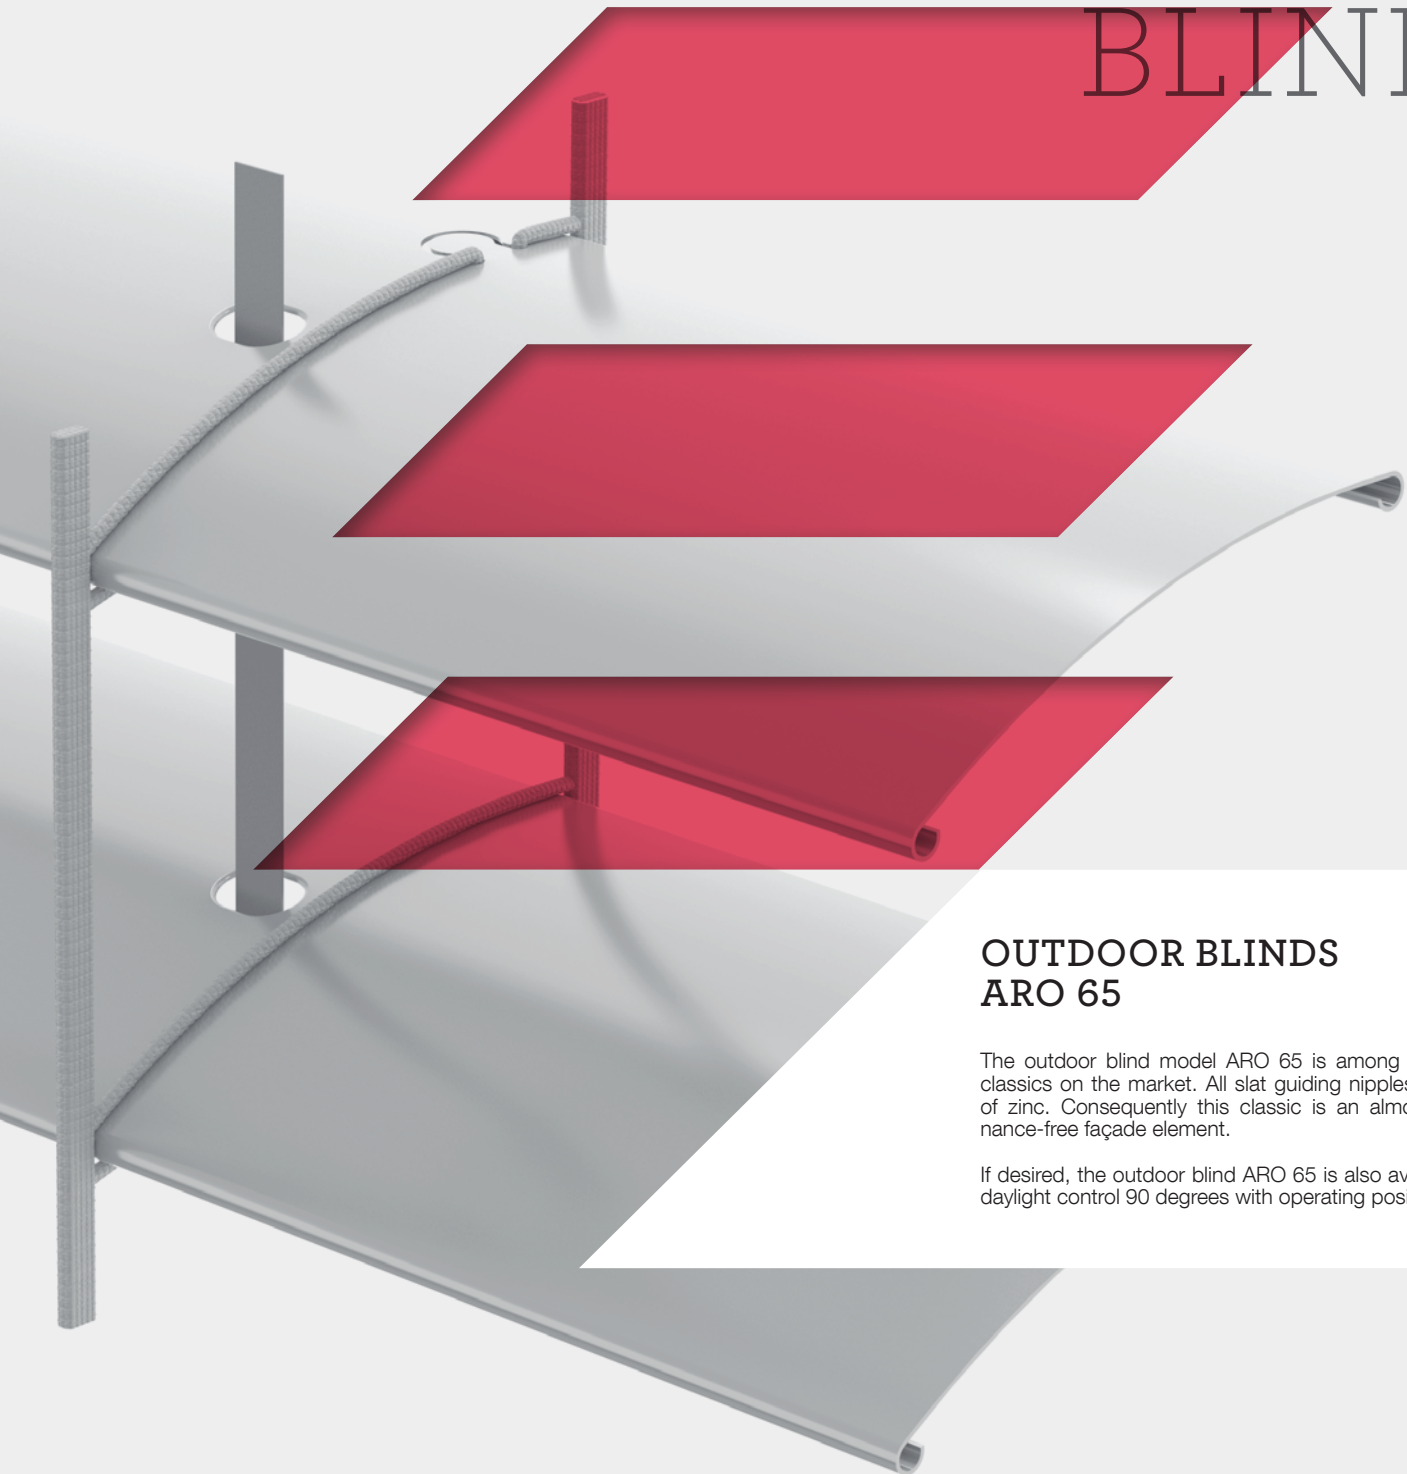

OUTDOOR BLINDS ARO 65

The outdoor blind model ARO 65 is among the proven classics on the market. All slat guiding nipples are made of zinc. Consequently this classic is an almost maintenance-free façade element.


If desired, the outdoor blind ARO 65 is also available with daylight control 90 degrees with operating position.

ARO 65


THE CLASSIC IN PROVEN DESIGN

The slats are - like all HELLA outdoor blinds - made of a highly flexible special aluminium alloy and convex-concave roll formed. Bordered hollow punchings protect the lifting tapes and supersede plastic clips. The bottom rail made of extruded aluminium profile is guided in the rails by plastic pins on both sides, which makes the entire slat curtain more stable.

Slat

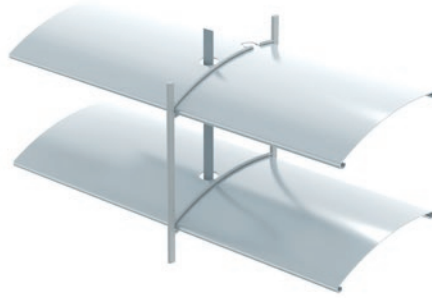


The convex-concave slat ARO 65




HELLA replaces the traditional ladder tape fixation with plastic eyelets by a fixation with the smart Omega punching. This creates a unique product without plastic eyelets. Perfect design and almost maintenance-free.

06/2019 7500 0015_EN

Installation examples

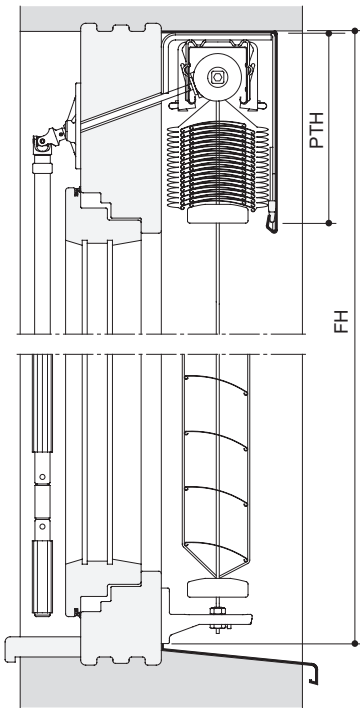

ARO 65 with top board and crank handle drive

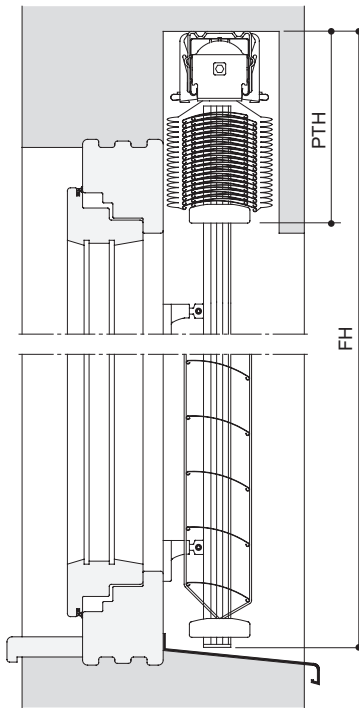

ARO 65 in the recess



With guide rail, closed



With guide rail, opened to 90°

Complete height (FH) [mm]	1000	1500	2000	2500	3000	3500	4000	4500	5000
Package height (PTH) [mm] ARO 65	160	190	220	255	285	320	350	380	415

Slat width [mm]	65	Slat type	Bordered
Side guidance	Cable/guide rail	Max. height [mm]	5200 (crank handle/motor)
Min. width [mm]	400 (crank handle)/430 (motor)	Max. width [mm] single unit	5000 (crank handle/motor)
Max. blind surface [m²] single unit	14 (crank handle)/20 (motor)	Max. blind surface [m²] linked units	12.6 (crank handle)/22.5 (motor)

Subject to modifications.

www.hella.info

